

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED PL LAMPS

CCT Selectable

ORDERING INFORMATION

Order code: 69382
Model number: PLL/S2/19W/3CCT/2G11/ND/STD
UPC: 069549026919
Case quantity: 30

PHYSICAL DATA


Shape: PLL
Base: 2G11
Length in. (mm): 22 1/2 (570)
Diameter in. (mm): 1 3/4 (44)

PERFORMANCE DATA

Watts (W): 19
Volts (V AC): 120-277
Color temperature (K):¹ 3 500/4 000/5 000
Lumen output (lm):² 2 650-2 750
Efficacy (lm/W): 120-125
CRI: 83
Beam angle (°): 120
Life L70 (h):³ 50 000
Dimming (yes/no): No
Power factor: 0.90
THD (%): 25
Frequency (Hz): 50/60
Input current (mA): 205 (depend on ballast)
Operating temp. range: -20 °C to 45 °C (-4 °F to 113 °F)
Installation method: Ballast compatible

¹ Typical color temperature range: +/- 5 %.² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

DIMENSIONS

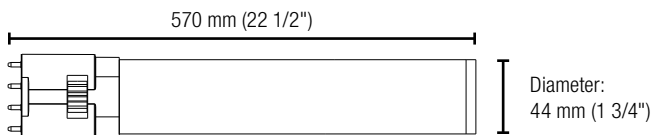

5 yrs
warranty

6
damp
location

ICES
005



enclosed
fixture

RoHS

c UL US

FC

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.